

**Verification Services**

Project No. 4787550049

Report No. 4787550049_9

Report Issued Date: 2016-08-15

Test Report

Customer Company & Address:			
ESPEN TECHNOLOGY ,INC SANTA FE SPRINGS CA 90670 USA			
Contact Person:	Melanie Barton		
Phone Number:	562-529-2938	Email Address:	melanie@espentech.com

Relevant Standards:	IES LM-79-2008
Product Description:	Luminaire Description: Indoor Retrofit kit Troffer Light Source: LGIT 5630 Ballast/Driver: VEL30075MVHDA-10V-1
Brand Name:	ESPEN
Tested Model Number:	VEKT2X2H-850
Product Family:	VEKT2X2H-830 VEKT2X2H-835 VEKT2X2H-840
Allowable Variations:	Different CCT
Electrical Specification:	120~277 V AC, 50~60 Hz, 22W

Test Laboratory & Address:			
UL Verification Services (Guangzhou) Co., Ltd. ADD: Building A1, 1F & 2F, Nansha Science and Technology Innovation Center, No. 25, South Huanshi Avenue , Nansha District, Guangzhou 511458, China			
Telephone:	+86 20 28667188	Fax:	+86 20 83486605

Sample Reception Date:	2015-12-14	Test Date:	2016-01-06
-------------------------------	------------	-------------------	------------

Tested By	Approved By
 /Jonathan Xu	 /Duff Yang
Signatory & Test Personnel Name	Signatory & Approval Name

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.



Test Report

Statement of Results

Test Flow	Test Item	Sample ID (Lab)	Pass/Fail/NA
1	Integrating Sphere Test	2270134-S4	Evaluate by customer

Deviation from Test Method (if any)

N/A

Remark (if any)

1. This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.

2.All data within this report comes from UL-CCIC Company Limited(NVLAP Lab Code:600106-0).



Test Report

Test Flow 1 : Integrating Sphere Test

Environmental Conditions

Temperature: 25.1°C

Test Equipment

Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
123709	Integrating Sphere	Before Use	Before Use
123701	Standard Lamp	2015-07-23	2016-07-22

Test Sample

2270134-S4

Test Method

The sample was tested according to the IES LM-79-2008.

The samples were tested fully and properly mounted in the troffer, Lithonia 2GT8 3 17 A12 MVOL GEB10IS.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Test Results


Test Type	Voltage (V AC)	Frequency (Hz)	Current (A)	Power Factor	Power(W)
Input	120.07	60	0.189	0.998	22.7

Test Type	CCT (K)	CRI	Lumen Output (lm)	Luminous Efficacy (lm/W)
Output	5238	84	2815	124.1




Test Report

Spectral Flux Graph

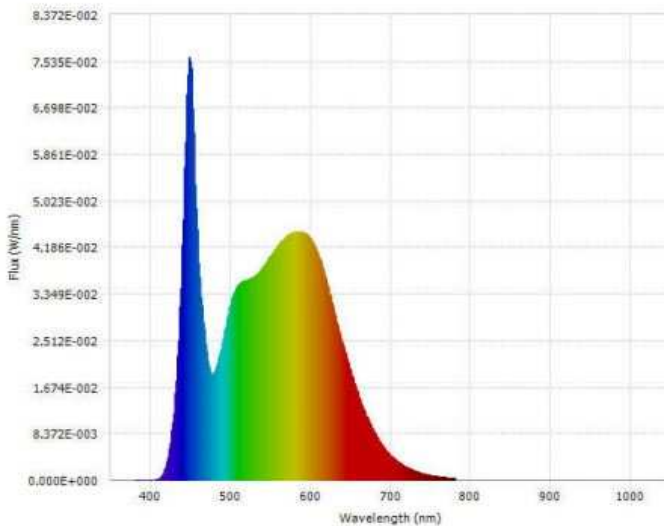

Chromaticity Diagram

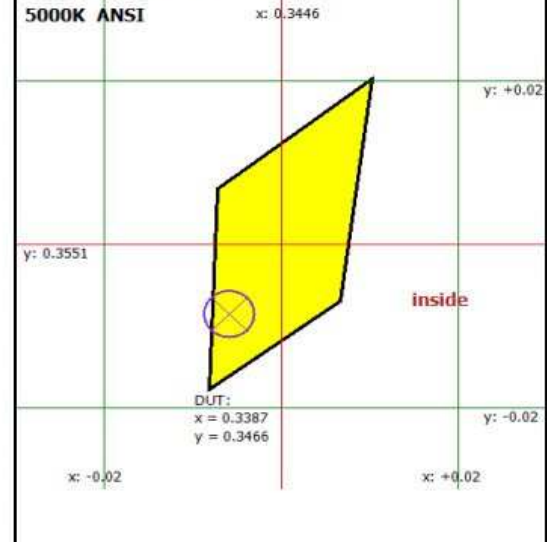


Spectral Result

Radiant Flux Φ	8.864 (W)	Luminous Flux $\Phi(v)$	2814.82 (lm)
$\Phi(v')$	5701.64 (lm')	Chrom x	0.3387
Chrom y	0.3466	Chrom u	0.2090
Chrom v	0.3208	Duv	0.0002
Chrom u'	0.2090	Chrom v'	0.4813
λ (peak)	448.2 (nm)	λ (center)	448.6 (nm)
λ (centroid)	547.0 (nm)	λ (dom)	567.8 (nm)
FWHM	21.5 (nm)	Purity	5.6 (%)
CCT	5238.0 (K)	Luminous Efficacy η	124.11 (lm/W)
SDCM	N/A	Ra	84.18
R1	82.6	R2	89.1
R3	93.7	R4	84.9
R5	84.4	R6	85.2
R7	86.1	R8	67.4
R9	7.2	R10	74.9
R11	85.6	R12	70.4
R13	84.2	R14	96.9
R15	76.9	DUT Current	0.1893 (A)
DUT Voltage	120.0700 (V)	DUT PF	0.9977
DUT Power	22.6800 (W)	DUT Freq	60.0 (Hz)
DUT THD	3.6 (%)	DUT Comments:	N/A
Date/Time	1/6/2016 3:31:27 PM		



Test Report

Photos of sample

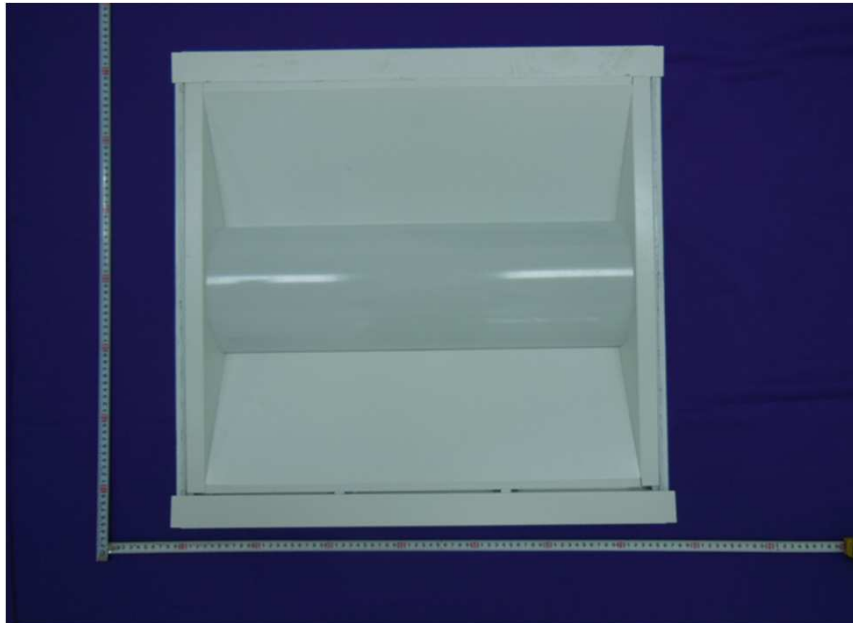

End of Test Report