



LM-79-08 Test Report

for

ESPEN TECHNOLOGY, INC.

12257 FLORENCE AVE SANTA FE SPRINGS CA90670-3805US

LED LAMP

Model: LB31T8U/830/13P-AB

Laboratory: Leading Testing Laboratories

NVLAP CODE: 200960-0

3rd Floor, Bld. 2, NO. 96 Longchuanwu Rd Qianjiang Economy Dev. Zone, Yuhang Dist,
Hangzhou, Zhejiang Province, China 311100

Tel: +86 571 86376106

www.ledtestlab.com

Report No.: HZ18080022i

The laboratory that conducted the testing detailed in this report has been accredited for SSL by NVLAP.

Review by:

Engineer: April Zou
Aug. 14, 2018

Approved by:



Manager: Jim Zhang
Aug. 14, 2018

Note: This report does not imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Test Summary

Model	LB31T8U/830/13P-AB
Luminous Efficacy (Lumens /Watt)	129.6
Total Luminous Flux (Lumens)	1995.0
Power (Watts)/2	15.40
Power Factor	0.9974
CCT (K)	2912
CRI	81.2
Stabilization Time (Light & Power)	60 mins
Note	3000K

Table 1: Executive Data Summary


Test specifications:

Date of Receipt	: May. 15, 2018
Date of Test	: May. 16, 2018
Test item	: Total Luminous Flux, Luminous Efficacy, Correlated Color Temperature, Color Rendering Index, Chromaticity Coordinate, Electrical parameters
Reference Standard	: IESNA LM-79-2008 Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products

TABLE OF CONTENT

LM-79-08 Test Report.....	1
Test Summary.....	2
Sample Photo.....	4
TEST RESULTS	5
Spectral Power Distribution - Sphere Spectroradiometer Method	6
Chromaticity Diagram - Sphere Spectroradiometer Method.....	7
Nominal CCT Quadrangles – Sphere Spectroradiometer Method	8
EQUIPMENT LIST	9
TEST METHODS	9
Seasoning of SSL Product.....	9
Sphere-Spectroradiometer Method- Photometric and Electrical Measurements.....	9

Sample Photo

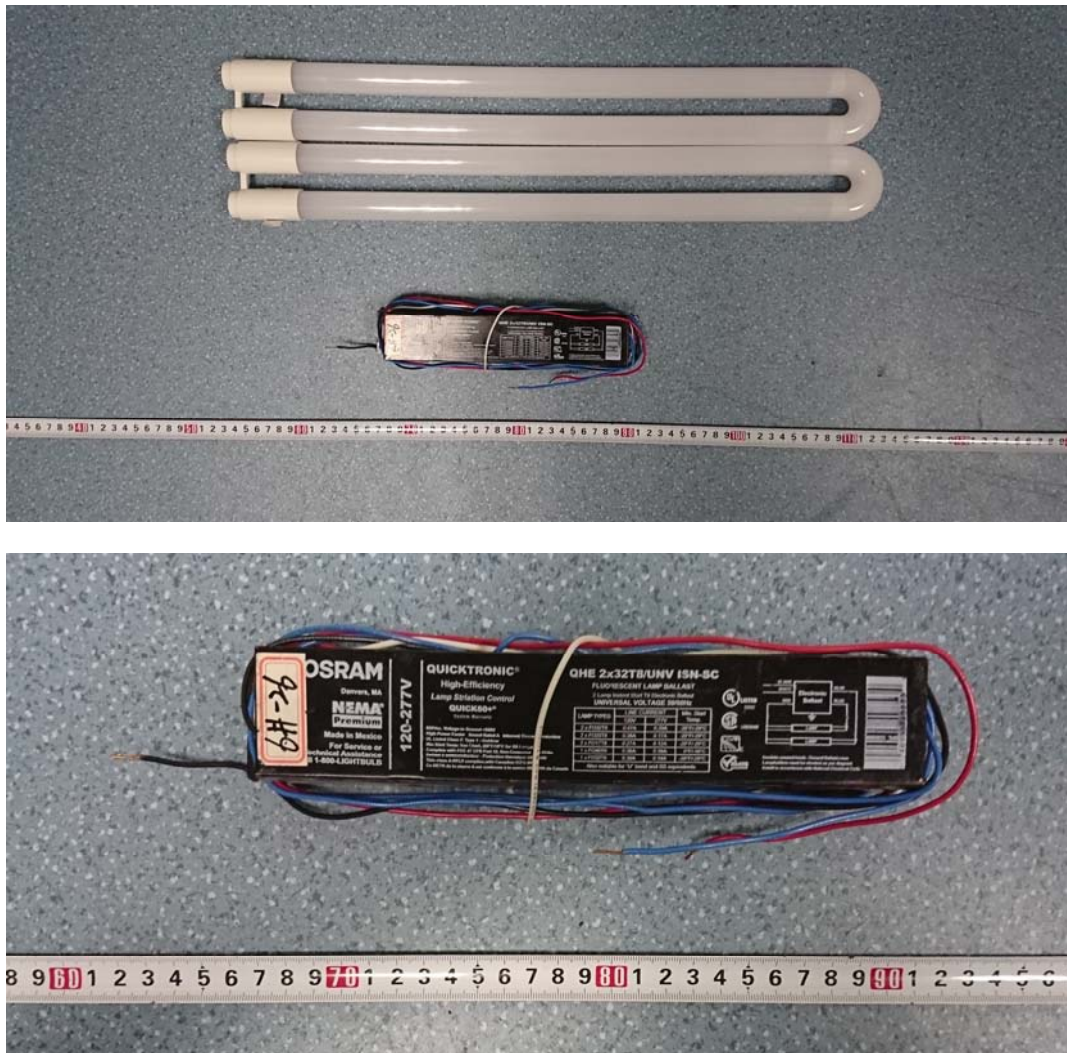

Sample view

Equipment Under Test (EUT)

Name	: LED LAMP
Model	: LB31T8U/830/13P-AB
Electrical Ratings	: 120-277V, 50/60Hz
Product Description	: 2G13 base, 3000K LED Tubes supplied by a high frequency fluorescent lamp ballast: QHE 2x32T8/UNV ISN-SC

TEST RESULTS

Test ambient temperature was 25.0°C.

Test orientation was light down. Test was conducted without a dimmer in the circuit.

The stabilization time of the sample was 60 minutes, and the total operating time including stabilization was 65 minutes.

Sphere-Spectroradiometer Method

Parameter	Result	
Test Voltage (V)	120.0	277.0
Voltage frequency (Hz)	60	60
Test Current (A)	0.257	0.116
Power Factor	0.9974	0.9633
Test Power (W)/2	15.40	15.52
THD A%	4.85	10.80
Luminous Efficacy (lm/W)	129.6	128.6
Total Luminous Flux (lm)	1995.0	1995.0
Color Rendering Index (CRI)	81.2	
R9	1.1	
Correlated Color Temperature (CCT)(K)	2912	
Chromaticity Chroma x	0.4416	
Chromaticity Chroma y	0.4031	
Chromaticity Chroma u	0.2540	
Chromaticity Chroma v	0.3478	
Duv	0.0013	
Chromaticity Chroma u'	0.2540	
Chromaticity Chroma v'	0.5217	

Special Color Rendering Indices	
R1	79.9
R2	91.7
R3	94.1
R4	78.1
R5	80.3
R6	90.3
R7	80.1
R8	55
R9	1.1
R10	81.5
R11	77.4
R12	72.4
R13	82.8
R14	97.5

Table 2: Test data per Sphere-Spectroradiometer Method

Note: According to CIE 1976 (u', v') diagram, $u' = u = 4x/(-2x+12y+3)$, $v' = 3v/2 = 9y/(-2x+12y+3)$.

Spectral Power Distribution - Sphere Spectroradiometer Method

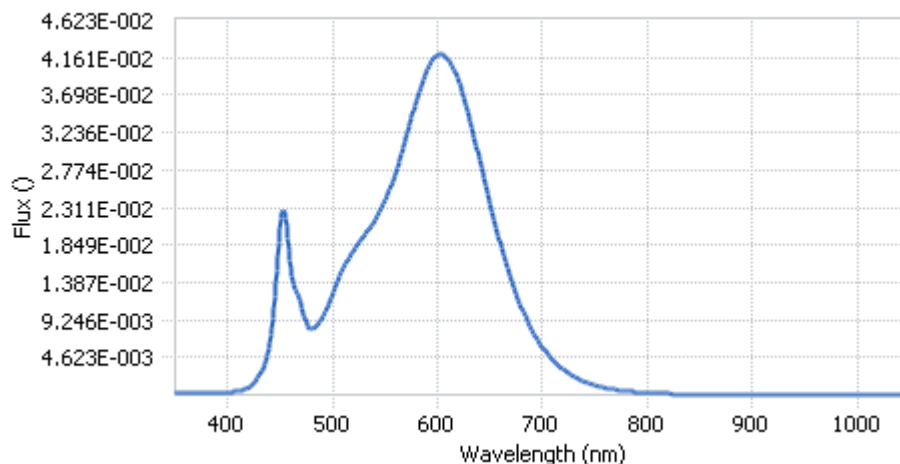


Chart 1: Spectral Power Distribution

Spectral Distribution over Visible Wavelength							
WL(nm)	Radiant(Watts)	WL(nm)	Radiant(Watts)	WL(nm)	Radiant(Watts)	WL(nm)	Radiant(Watts)
380	2.94E-04	485	8.60E-03	590	4.00E-02	695	6.85E-03
385	2.97E-04	490	9.48E-03	595	4.13E-02	700	5.88E-03
390	2.97E-04	495	1.08E-02	600	4.19E-02	705	5.02E-03
395	3.29E-04	500	1.26E-02	605	4.20E-02	710	4.28E-03
400	3.29E-04	505	1.42E-02	610	4.14E-02	715	3.66E-03
405	3.75E-04	510	1.56E-02	615	4.03E-02	720	3.13E-03
410	4.74E-04	515	1.69E-02	620	3.87E-02	725	2.67E-03
415	6.44E-04	520	1.79E-02	625	3.66E-02	730	2.28E-03
420	9.52E-04	525	1.88E-02	630	3.43E-02	735	1.93E-03
425	1.47E-03	530	1.97E-02	635	3.17E-02	740	1.64E-03
430	2.38E-03	535	2.05E-02	640	2.90E-02	745	1.40E-03
435	3.84E-03	540	2.16E-02	645	2.63E-02	750	1.19E-03
440	6.51E-03	545	2.27E-02	650	2.36E-02	755	1.03E-03
445	1.22E-02	550	2.40E-02	655	2.09E-02	760	8.77E-04
450	2.05E-02	555	2.55E-02	660	1.86E-02	765	7.53E-04
455	2.17E-02	560	2.74E-02	665	1.63E-02	770	6.42E-04
460	1.55E-02	565	2.96E-02	670	1.43E-02	775	5.50E-04
465	1.28E-02	570	3.18E-02	675	1.24E-02	780	4.71E-04
470	1.13E-02	575	3.41E-02	680	1.08E-02		
475	8.82E-03	580	3.64E-02	685	9.31E-03		
480	8.07E-03	585	3.85E-02	690	8.00E-03		

Table 3: Spectral Power Distribution Numerical Data per Sphere - Spectroradiometer Method

The diagram is a CIE 1931, 2 Degree color space plot. The x-axis is labeled 'x' and ranges from 0.1000 to 0.7000. The y-axis is labeled 'y' and ranges from 0.1000 to 0.8000. The plot shows the visible spectrum as a curved boundary, with colors transitioning from violet at the bottom left to red at the bottom right, then through orange, yellow, green, and blue back to violet at the top left. A straight line, the line of purples, connects the ends of the visible spectrum. A series of points are marked along the spectrum, labeled with wavelengths: 380, 400, 420, 440, 460, 480, 500, 520, 540, 560, 580, 600, 620, 640, 660, 680, and 700. A set of curves, representing the color matching functions, is plotted within the color space. A specific point is marked on the curve for the 'D65' illuminant, labeled 'D65'.

Chart 2: Chromaticity Diagram per Sphere - Spectroradiometer Method

Note: The location on the diagram of the tristimulus coordinates are indicated by the blue diamond.

Nominal CCT Quadrangles – Sphere Spectroradiometer Method

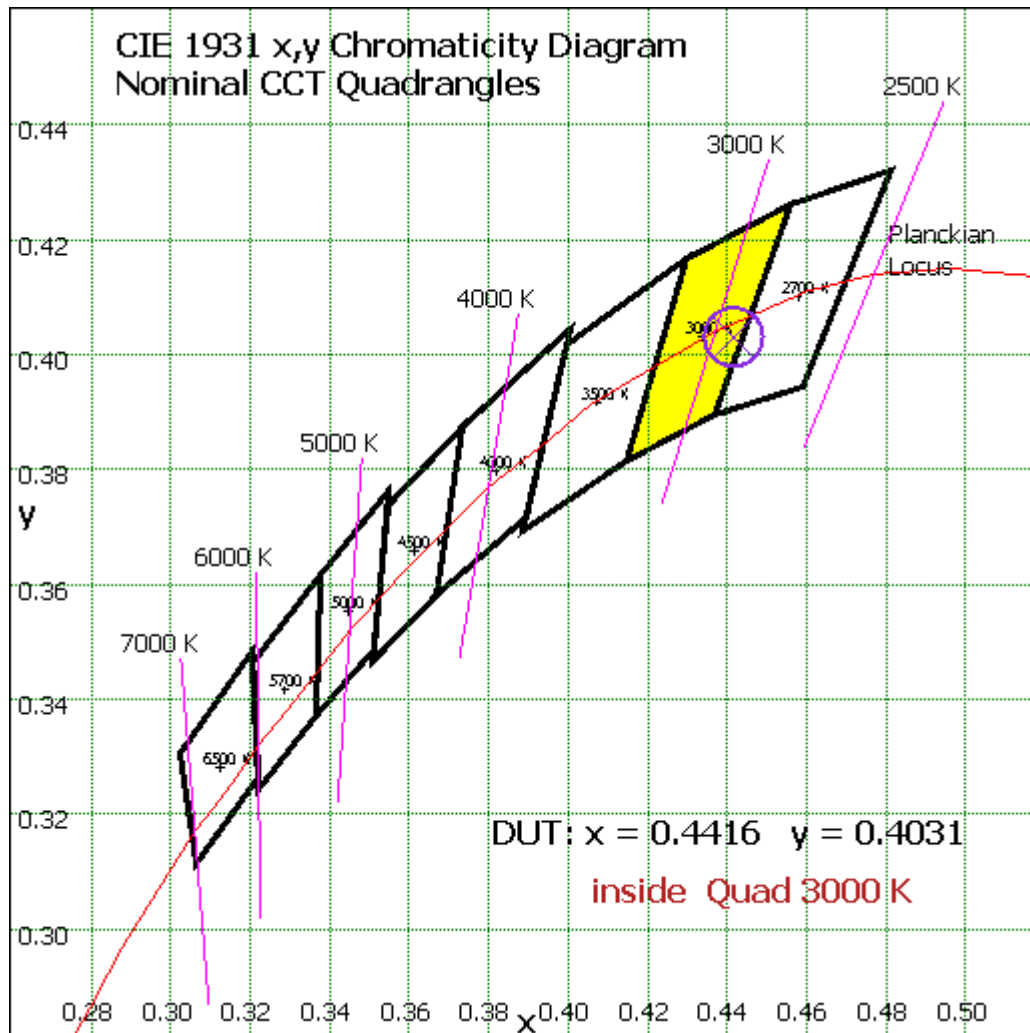


Chart 3: Plot of Lamp x/y coordinates on CIE 1931 Chromaticity Diagram

EQUIPMENT LIST

Test Equipment	Model	Equipment No.	Calibration Date	Calibration Due date
Integrate Sphere system	2M	HZTE015-01	Aug. 23, 2017	Aug. 22, 2018
Digital Power Meter	WT210	HZTE008-01	Aug. 10, 2017	Aug. 09, 2018
AC Power Supply	PCR 500L	HZTE001-07	Aug. 10, 2017	Aug. 09, 2018
DC Power Supply	IT6154	HZTE004-04	Aug. 10, 2017	Aug. 09, 2018
Temperature and humidity recorder	JR900	HZTE018-02	Aug. 16, 2017	Aug. 15, 2018
Standard source	SCL-1400	HZTE012-02	Aug. 20, 2017	Aug. 19, 2018
Temperature Meter	TES1310	HZTE017-01	Aug. 17, 2017	Aug. 16, 2018

Table 4: Test Equipment List

TEST METHODS

Seasoning of SSL Product

For the purpose of rating new SSL products, SSL products shall be tested with no seasoning. Therefore, no seasoning was performed.

Sphere-Spectroradiometer Method- Photometric and Electrical Measurements

A Labsphere Model CDS 2100 Spectroradiometer and Two Meter Sphere was used to measure correlated color temperature, chromaticity coordinates, and the color rendering index for each SSL unit. The coating reflectance of each sphere is 98%. The measure geometry is 4π . Self-absorption correction is conducted in testing. Bandwidth of spectroradiometer is 350nm-1050nm.

Ambient temperature was measured at a position inside the sphere. Each SSL unit was operated on the client provided driver at the rated input voltage in its designated orientation.

The stabilization time typically ranges from 30 min (small integrated LED lamps) to 2 or more hours for large SSL luminaires). It can be judged that stability is reached when the variation (maximum – minimum) of at least 3 readings of the light output and electrical power over a period of 30 min, taken 15 minutes apart, is less than 0.5 %.

Electrical measurements including voltage, current, and power were measured using the Yokogawa Power Analyzer.

The standard reference of the integrated sphere system is halogen incandescent lamp, the intensity distribution type is omni-directional, and is traceable to the National Institute of Standards and Technology.

The uncertainty of integrating sphere system reported in this document is expanded uncertainty is 2.1% with a coverage factor $k=2$.

*** End of Report ***

This report is considered invalidated without the Special Seal for Inspection of the LTL. This report shall not be altered, increased or deleted. The results shown in this test report refer only to the sample(s) tested. Without written approval of LTL, this test report shall not be copied except in full and published as advertisement.